


THE BEST OSB STRUCTURAL PANEL IN THE WORLD

LP promotes the Energy thermal and Earthquake resistant Construction System used in 90% of home construction in the United States and Canada.
Thermal conductivity : 0,13 w / mk.
Density : 680 kg / m³.

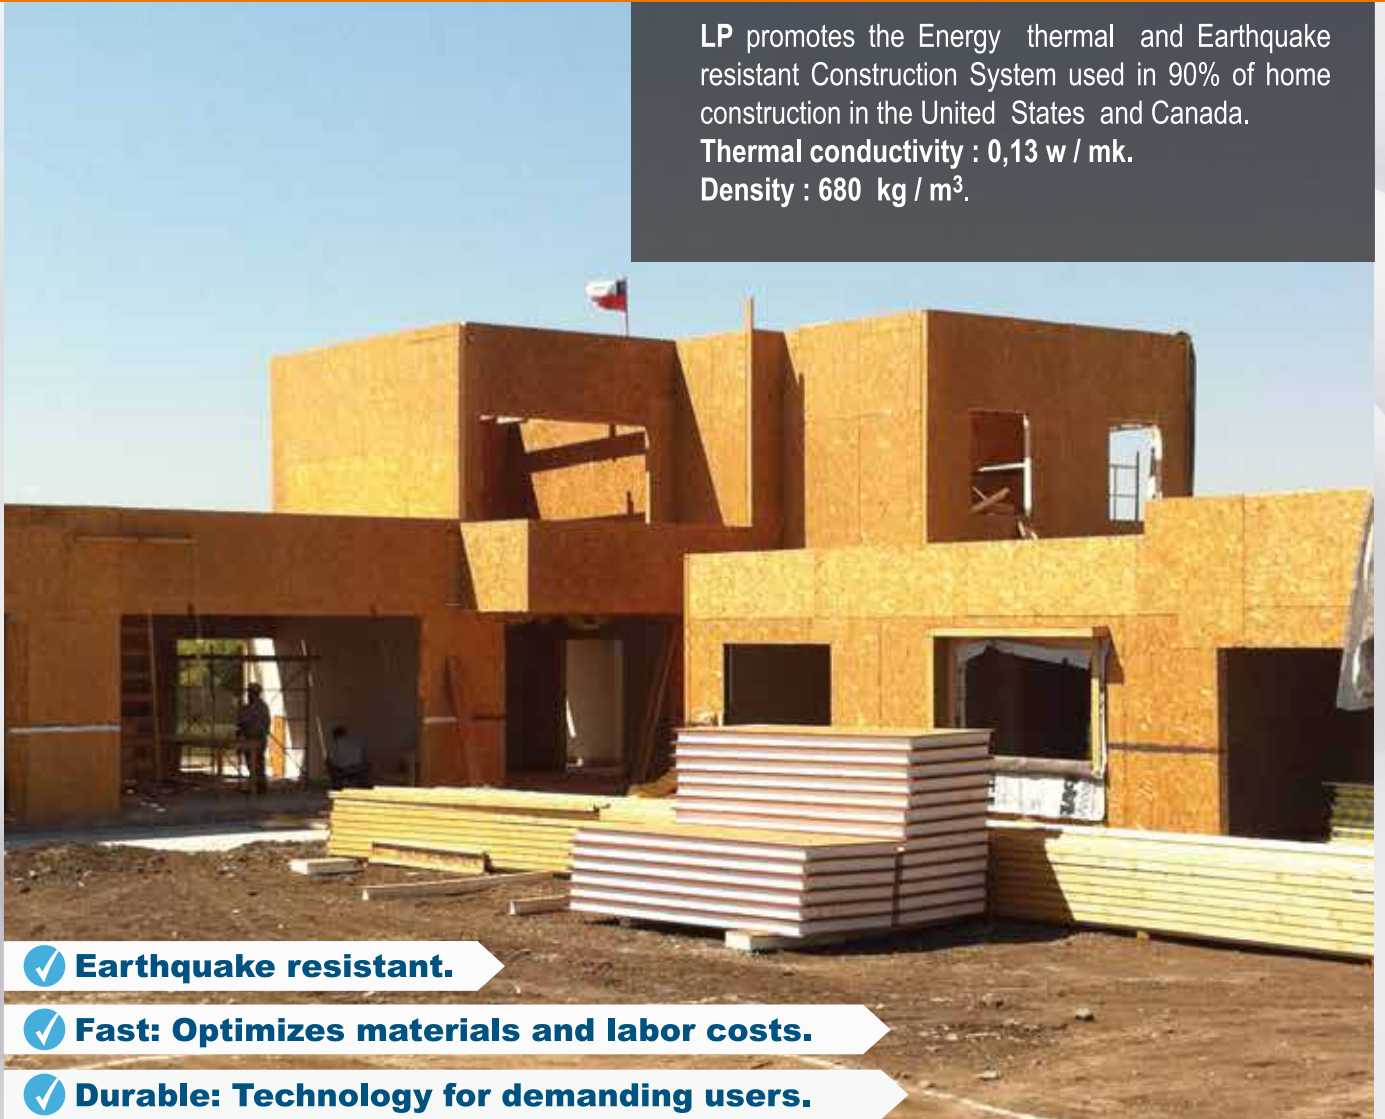

✓ **Earthquake resistant.**

✓ **Fast: Optimizes materials and labor costs.**

✓ **Durable: Technology for demanding users.**



OSB APA

STRUCTURAL



■ CERTIFIED STRUCTURAL PANELS.

www.LPChile.cl

STRUCTURAL PANELS FOR DWELLING

✓ WALLS ✓ ROOFS ✓ FLOORING



ALWAYS USE PERSONAL PROTECTION ELEMENTS



ROUGH SIDE

For your safety, LP has designed an ANTI-SLIP side, minimizing the risk of fall by slipping on roof installations.



PAINTED EDGE

The high visibility color highlights the panel's edges, preventing accidents in its handling, and also permits checking the panels' horizontal position easily. The color also becomes a symbol that prevents the intrusion of moisture through the edges.



OSB TECHNOLOGY

Structural OSB panels (Oriented Strand Board) are manufactured with wood strands placed in 3 intertwined layers perpendicular to each other.



APA CERTIFICATION

(The Engineered Wood Association) the quality agency that certifies the majority of the world's structural panels. It is a quality seal of compliance with the United States' structural regulations.



LAST GENERATION ADHESIVES


Phenolic and polyurethane resins (MDI) are used in the manufacturing of our products, which ensures strands' high internal adherence, and also translates into more stable and durable panels.



FIRE RESISTANT

Fire resistant assimilable to F-15 as interior sheathing when using OSB or SmartPanel on the exterior side.

- LP OSB APA
- LP OSB APA PLUS
- LP OSB APA GUARD

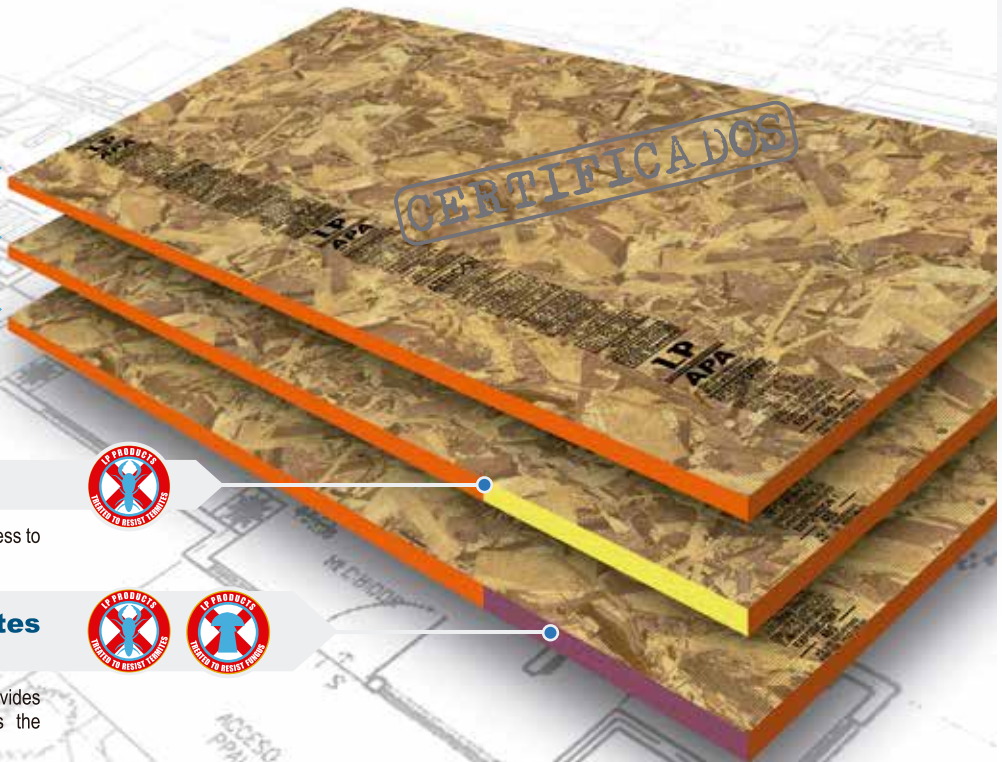

Protection against termites

It incorporates zinc borates, a natural additive harmless to humans and protects the termites.



Protection against termites and degradation by fungus

It has triple zinc borate concentration, which provides greater protection against termites and prevents the degradation by fungus.



| PRODUCTS | THICKNESS | PANEL FORMATS | WEIGHT PER PANEL | UNIT X PALLET |
|------------------------|-----------------------|-------------------------|------------------|----------------|
| OSB APA / PLUS / GUARD | 9,5 mm. | 1,22 m x 2,44 m. | 21,1 kg. | 84 uni. |
| | 11,1 mm. | 1,22 m x 2,44 m. | 24,1 kg. | 72 uni. |
| | 15,1 mm. | 1,22 m x 2,44 m. | 32,7 kg. | 53 uni. |
| | 18,3 mm. | 1,22 m x 2,44 m. | 38,7 kg. | 45 uni. |
| OSB APA 2 | 11,1 mm. | 1,22 m x 4,88 m. | 45,9 kg. | 36 uni. |
| TopNotch | 15,0 mm. real advance | 1,22 m x 2,44 m. | 31,8 kg. | 53 uni. |
| | 18,0 mm. [1,21m] | 1,22 m x 2,44 m. | 38,0 kg. | 45 uni. |

We recommend following all instructions on this sheet, before using the product. If you have any questions, please contact our technical support team at (562) 2414 2200 or e-mail contacto@lpchile.cl